

X7

CAN MAN

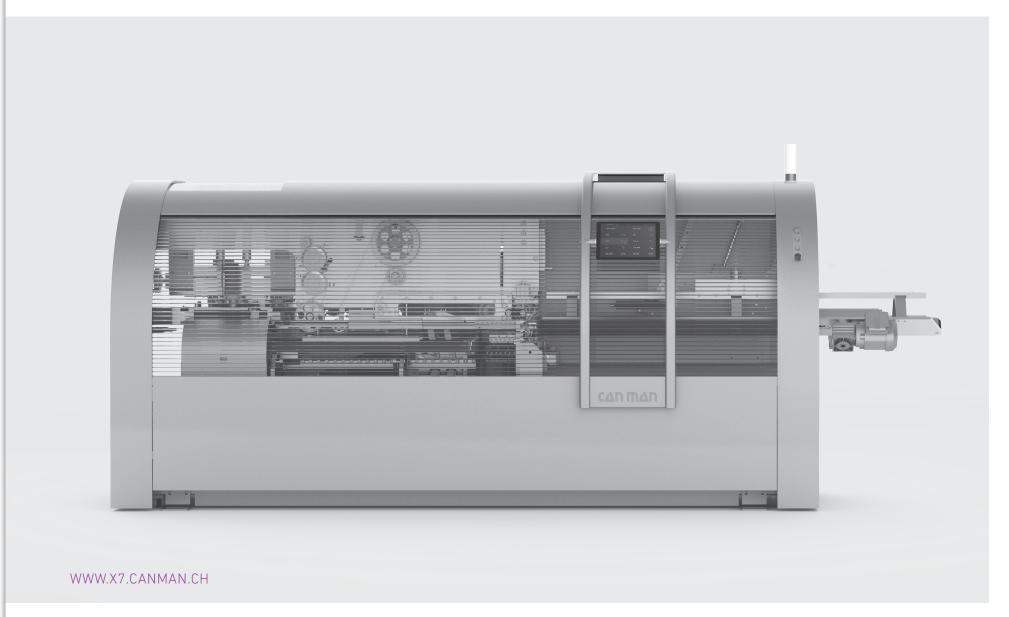

X7 at a glance

- One concept with the potential to replace dozens of old(er) ones.
- 2 30 % reduction of moving parts increases reliability and lowers running costs.
- 3 Latest servo technology supports drives synchronization after format changeover.
- First Can Man machine which can be configured online for your specific needs.



QuickChange™ PLUS

Automated can body height change – 2 minutes and your machine is ready for a new production run. You can perform a complete format change in just 30 minutes – the world record for medium- and high-speed welders!




SmartFORMER™

The synchronisation of tinplate entering the rollformer, the rounding process and the impact of the rounded blank at the catch rail is controlled by servo drives (patents pending). Servicing and even "exchanging" this unit is a "no brainer". NEW: a scoring unit can now be added and removed whenever needed!



Minimized Change Parts

The canbody transport also serves as a canbody pre-guidance and it automatically adapts to any canbody diameter you may select at the push of a button. This makes the change of a format-dependent guide channel unnecessary.

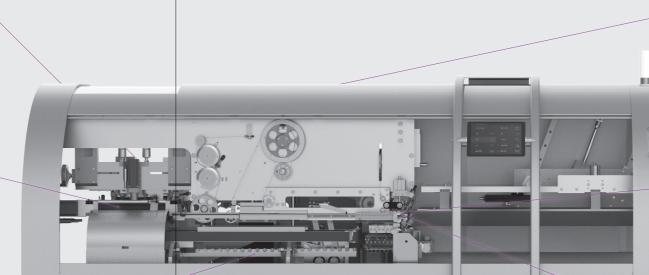


Accessibility

The entire water- and air-supply unit can be swung out and ensures full access to all the vital parts of a welder and therefore eases the maintenance.




Controlled Wear

The split nosepiece has to be changed only partially if worn, and even ceramic made ones which are sensitive to tensions cannot break.



XPlane™ v2

Optimized for the use with a "flying" powder arm: while the lower welding arm remains fixed in its position, the redressed welding roller is re-adjusted along its flat surface. It also increases the power transmission significantly.




Designed, Manufactured & Assembled in Switzerland

Technical Data

Medium Speed Welding Bodymaker

Production Output	100 - 600 cans/min, 10 - 100 meter/min
Body Sizes	min. Ø 52 x h 50 mm
	max. Ø 153 x h 320 mm
Sheet Thickness	0.10 – 0.28 mm

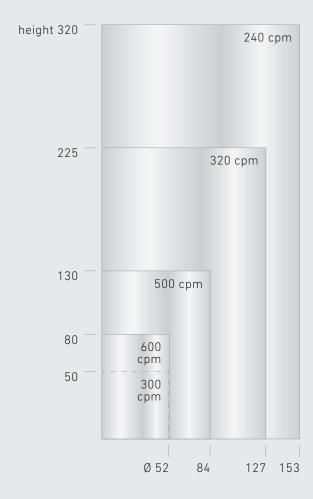

Can Man AG

 Muelisacker 221
 T +41 62 777 444 0
 sales@canman.ch

 CH-5705 Hallwil
 F +41 62 777 444 1
 www.canman.ch