


Chiller cool water Chiller warm water (optional)

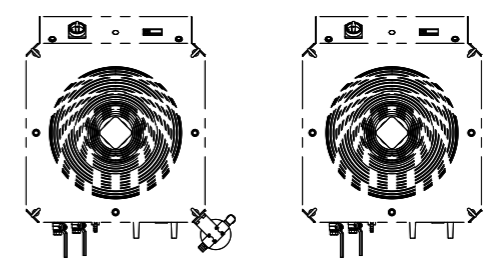


Machine colour:
RAL 9006 = white-aluminium, bright
RAL 4008 = signal violet

Ambient: +5°C ... +45°C
Relative humidity: max. 85%



min floor loading: 1500 kg/m²

WP ≙ Welding point

	A	B	C	D	Material:	Oberfläche:	Bemerkung:
	Electrical Supply	Water inlet	Water outlet	Air Supply	Dimension:	Masse in kg:	Technical changes reserved !
X7	3x400 VAC+N+Ground Power: 35 kVA Control voltage: 24 VDC Fuse: 3 x 63 A	Connection G 3/4" Pressure min 6 bar Cooling power min 12 kW	Connection G 3/4" Backpressure max 1 bar	Connection: G 1/2" Pressure min: 6 bar	Bezeichnung: X7 WeldCENTER™ Layout	kg	Schutzvermerk nach DIN 34 beachten.
Chiller	Electrical Supply 3x400 VAC+N+Ground Power: 8.8 kW Cooling power 2x12 kW	Volume min 40 l/min Set temp. min 25°C Environment temp. 10...43°		Air Consumption 51 m ³ /h			1:30
						Format: A3	Blatt: 1 / 2 zuletzt gespeichert am: Donnerstag, 23. Mai 2019 22:56:03
					CAN MAN		17_00_00000 -

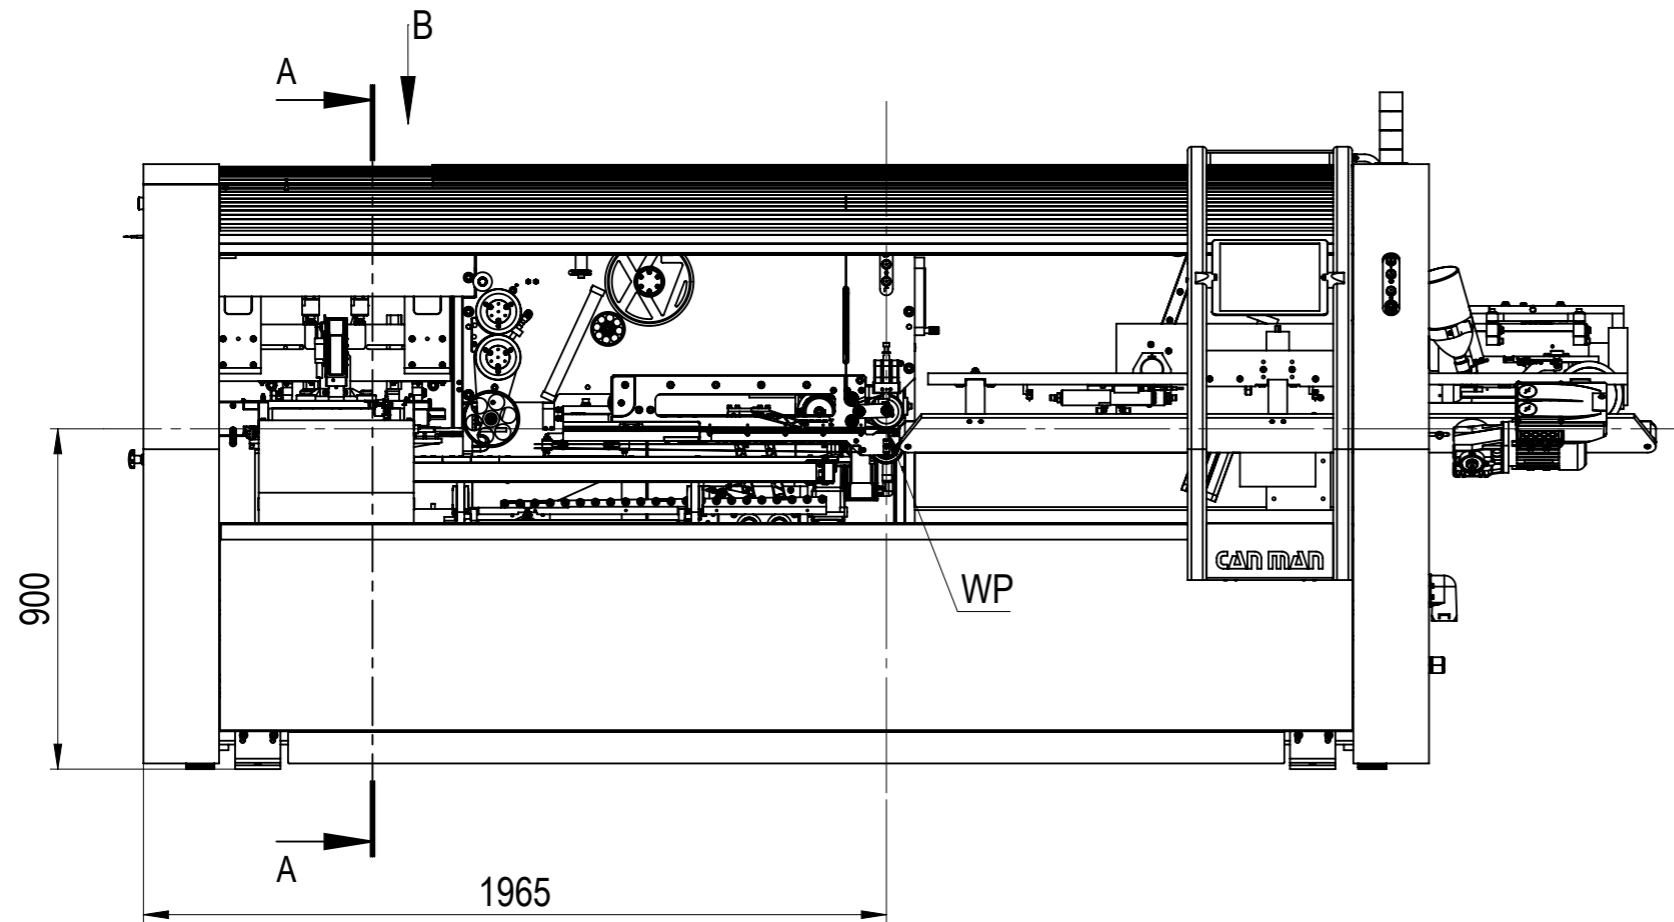

B (1 : 8)

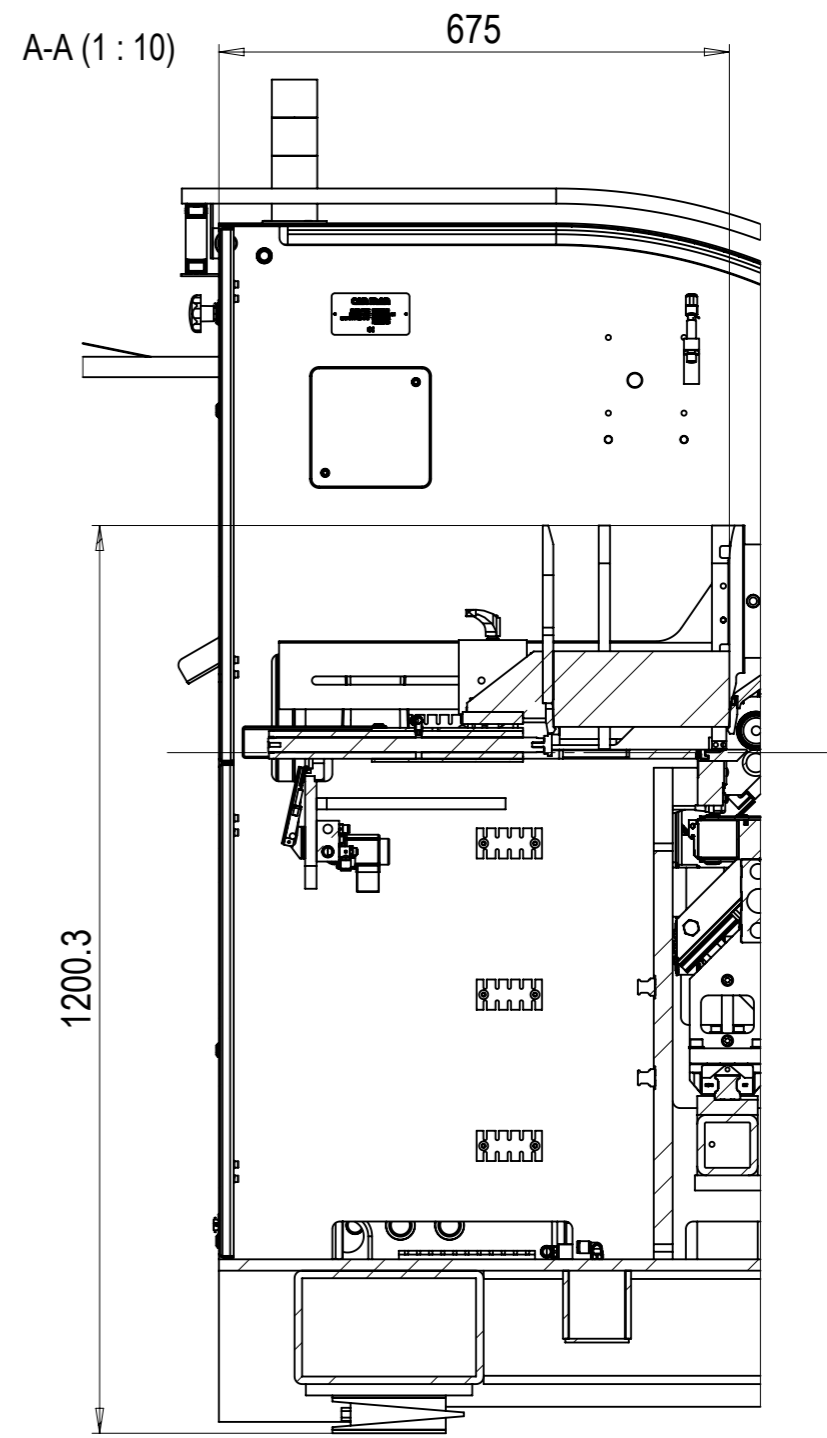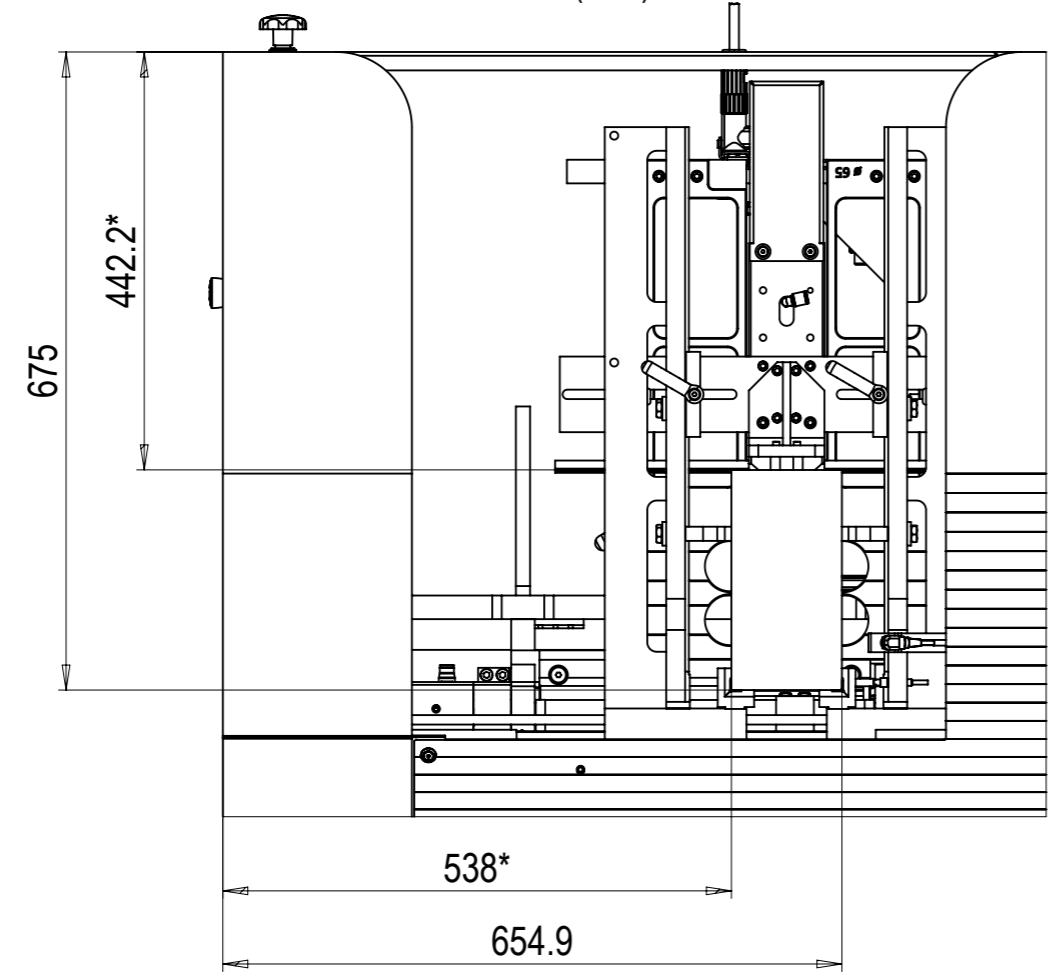

* Δ Depending on the format of the sheet, $\varnothing 74.1 \times 116.9$ in this case

WP Δ Welding point

Material:	Oberfläche:	Bemerkung: Technical changes reserved !		
Dimension:	Masse in kg: kg			
Bezeichnung: X7 WeldCENTER™ Layout		Schutzvermerk nach DIN 34 beachten.		
		Masstab	Gezeichnet	PB 29.12.2016
		1:20	Geprüft	DM 23.05.2019
		Filemaker-Nr	017000	
		Format: A3	Blatt: 2 / 2	zuletzt gespeichert am: Donnerstag, 23. Mai 2019 22:56:03
CAN MAN			17_00_00000	-